

# Cyklon H



Colour included  
in the price



Cyklon H 410 x 1600  
colour: RAL 1015


Integrated thermostatic valve with immersion tube, angled, left, chrome  
SLIM thermostatic head, chrome  
Integrated pipe-masking set, chrome



Colour included  
in the price

design: Maja Zalewska, Marek Kostykiewicz (M4M)

## Connections:



## We recommend:









KUKA hanger



Zinc primer





## Available sizes:

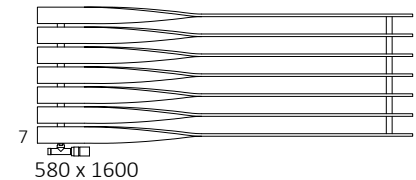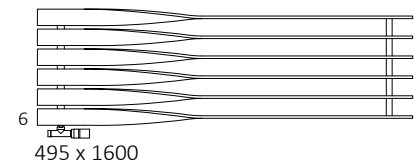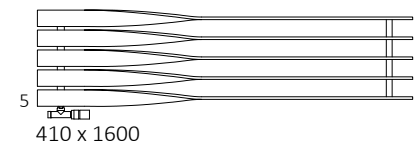

## Specifications:

Working pressure: 0,7 MPa    Maximum operating temperature: 95°C

A ↓	B ↔	75/65/20°C [W]	55/45/20°C [W]	D [mm]	E [mm]	F [mm]	 [dm³]	 [kg]	Product Code <small>Configuration codes: 4</small>
410	1000	408	212	800	170	120	2,59	13,05	WGCIYH041100
410	1300	497	255	1100	170	120	3,29	16,65	WGCIYH041130
410	1600	587	298	1400	170	120	3,98	20,24	WGCIYH041160
495	1000	490	249	800	255	120	3,12	15,68	WGCIYH049100
495	1300	597	299	1100	255	120	3,95	19,99	WGCIYH049130
495	1600	704	349	1400	255	120	4,78	24,31	WGCIYH049160
580	1300	697	342	1100	340	120	4,62	23,34	WGCIYH058130
580	1600	821	399	1400	340	120	5,59	28,37	WGCIYH058160


**Included components:** The radiator is sold with an integrated, angled thermostatic valve with immersion tube, SLIM thermostatic head and adapters for installation (Alupex Ø 16x2 and copper Ø 15). All valve components are finished in chrome.

# Cyklon H




Colour included  
in the price

**O1**

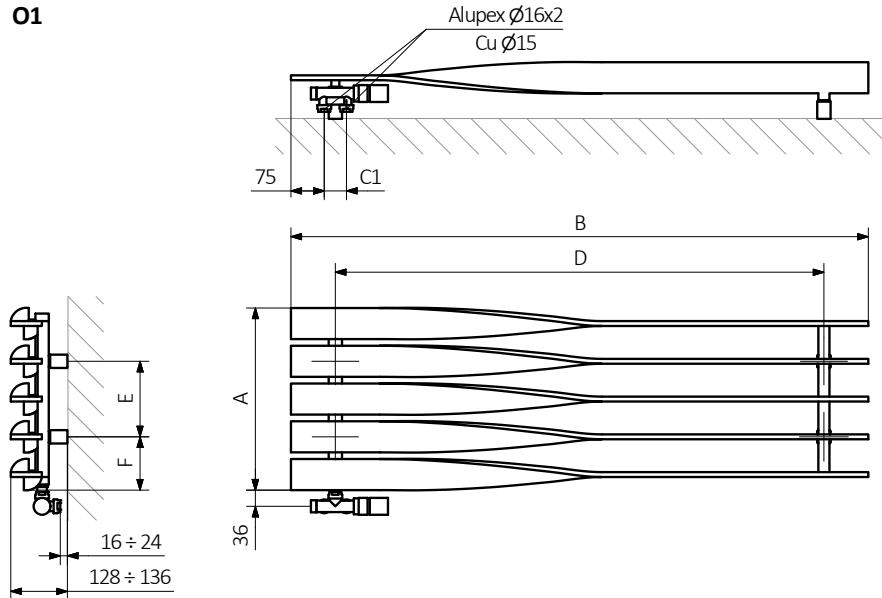


**O8**


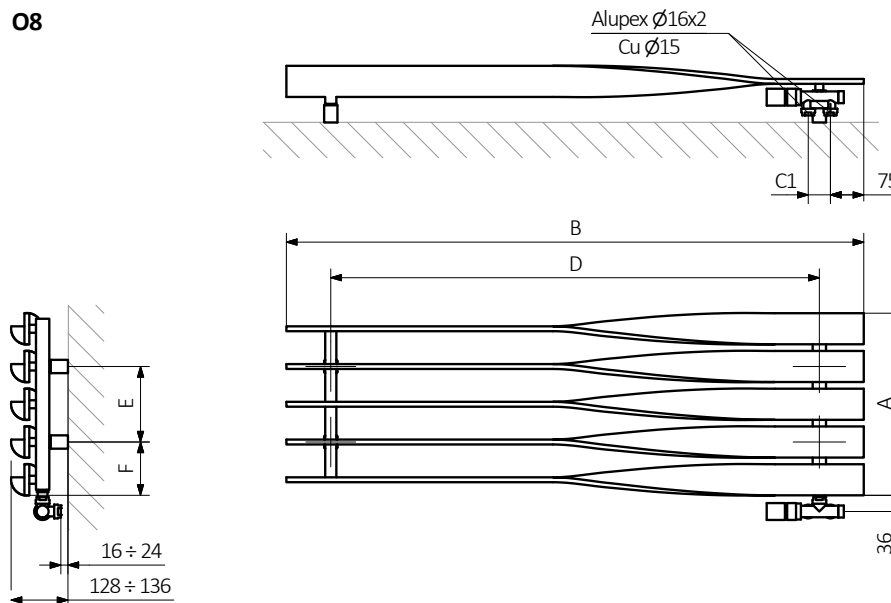


A — Height B — Width C1-C5 — Distance between pipe centres D — Horizontal distance between mounting bracket centres  
E — Vertical distance between mounting brackets F — Distance between a mounting bracket and the bottom of the radiator

**Collector:**



**Profile:**





Colour included  
in the price

Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

The construction of a water and dual fuel radiator product and configuration code:

WGALE054030

K916SX

PRODUCT CODE  
(located in the table for the product)

CONFIGURATION CODE  
(supplemented by hand)

Configuration

K 916 SX

Package code   Colour code   Connection code  
*K – carton box*

Zinc powder primer

**C** – Code of zinc powder primer is an extra processes

WLALE054030 K916SX **C** — *Extra processes or additions code*

## Legend



Available in chrome finish.



Radiator available in a "water" version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a 'heating medium' and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator.

The icon shows the flow and return connections for the radiator as well as the thermostat valve and heating element position if applicable.



Optional connections available for this radiator.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.