Mantis

Colour included in the price

TERMA
SINCE 1990

Mantis   1260 x 540   KTX 3 heating element, chrome
colour: RAL 5018

Mantis

Colour included in the price

Connections:

SX	Z1	Z8	ZX	LX	L8
5L	58	PX	P1	5P	51
O1	O8				
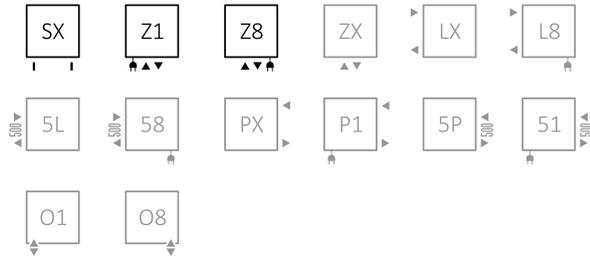
Electric radiators:

| E1 | E8 |

We recommend:

Integrated thermostatic valve set for Z1 and Z8 connections

Integrated pipe-masking set

ZIP H hanger

KTX 1 heating element

## Available sizes:

| 860 x 440 | 860 x 540 | 1260 x 440 | 1260 x 540 | 1560 x 440 | 1560 x 540 |
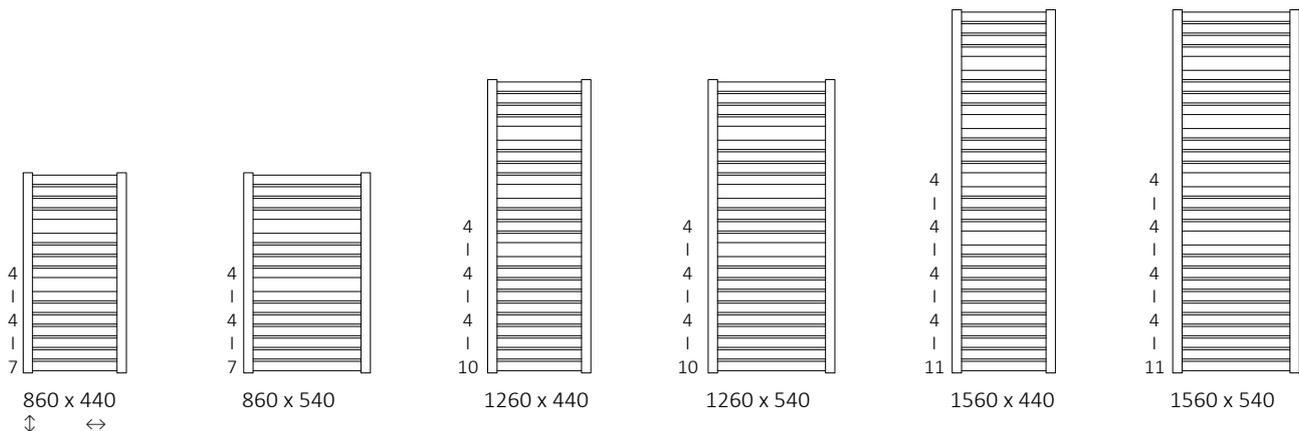
Specifications:

Working pressure: 0,8 MPa   Maximum operating temperature: 95°C

A ↕	B ↔	C1 [mm]	C2 [mm]	75 65 20℃ [W]	55 45 20℃ [W]	⊙ [W]	D [mm]	E [mm]	F [mm]	⊟ [dm³]	[kg]	Product Code
860	440	50	400	351	185	400	400	680	90	3,03	9,05	WGMAT086044
860	540	50	500	423	223	400	500	680	90	3,41	10,71	WGMAT086054
1260	440	50	400	502	266	600	400	1080	90	4,44	13,42	WGMAT126044
1260	540	50	500	605	319	600	500	1080	90	5,00	15,79	WGEMAT126054
1560	440	50	400	615	326	600	400	1380	90	5,47	16,51	WGMAT156044
1560	540	50	500	742	391	800	500	1380	90	6,17	19,42	WGMAT156054

Configuration codes. 4

Mantis

TERMA
SINCE 1990

Colour included
in the price

SX

G1/2" G1/2"

$57 \div 65$

C2

Z1

G1/2"

$57 \div 65$

C1

Z8

G1/2"

$57 \div 65$

C1

5

B

D

E

A

F

$42 \div 50$

$72 \div 65$
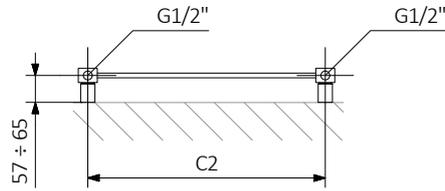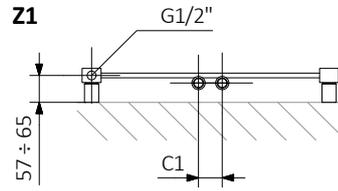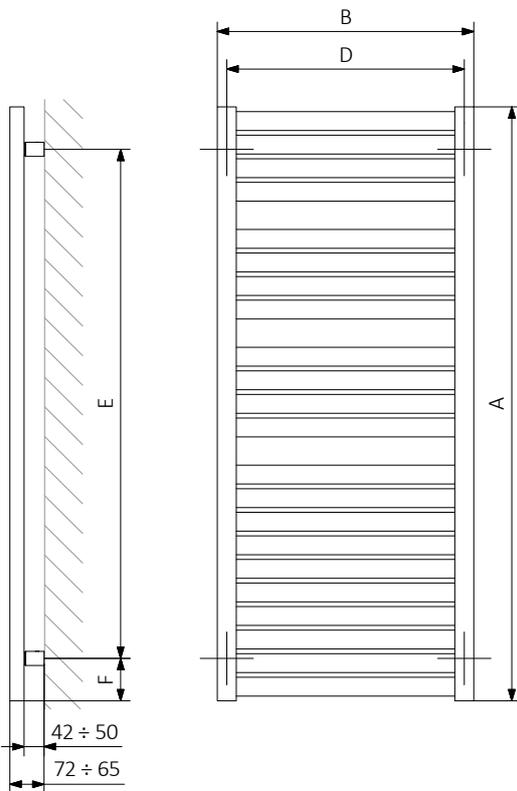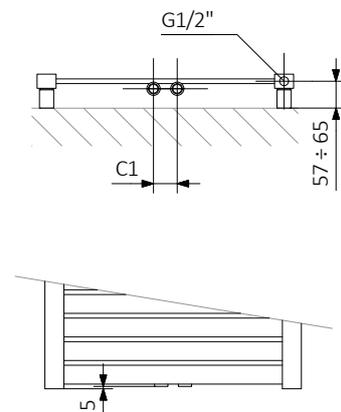
A — Height   B — Width   C1-C5 — Distance between pipe centres   D — Horizontal distance between mounting bracket centres
E — Vertical distance between mounting brackets   F — Distance between a mounting bracket and the bottom of the radiator

Collector: **Profile:**

40

30

40

10

Mantis

Colour included
in the price

Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

The construction of a water and dual fuel radiator product and configuration code:

WGALE054030   K916SX

PRODUCT CODE
(located in the table for the product)

CONFIGURATION CODE
(supplemented by hand)

Configuration

K 916 SX

Package code   Colour code   Connection code
K – carton box

Construction of electric heater configuration code

WLALE054030   K916E1DRYM

PRODUCT CODE
(located in the table for the product)

CONFIGURATION CODE
(supplemented by hand)

Configuration

K 916 E1 DRY M

Package code   Colour code   Connection code   Heating element code   Type of heating element cable code
K – carton box

Zinc powder primer

C – Code of zinc powder primer is an extra processes

WLALE054030 K916SX C ——— *Extra processes or additions code*

Colour included
in the price

Legend

Cr Available in chrome finish.

Radiator available in a "water" version.

Radiator suitable for dual fuel connection. Electric heating element can be installed.

Radiator available in electric only version. It comes prefilled with a 'heating medium' and equipped with a heating element. All tested and ready to use.

Connection types dedicated for this radiator.
The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.

Optional connections available for this radiator.

Suggested heating element power output for electric and dual fuel versions.

Weight.

Capacity.