


Sherwood H



Colour included
in the price

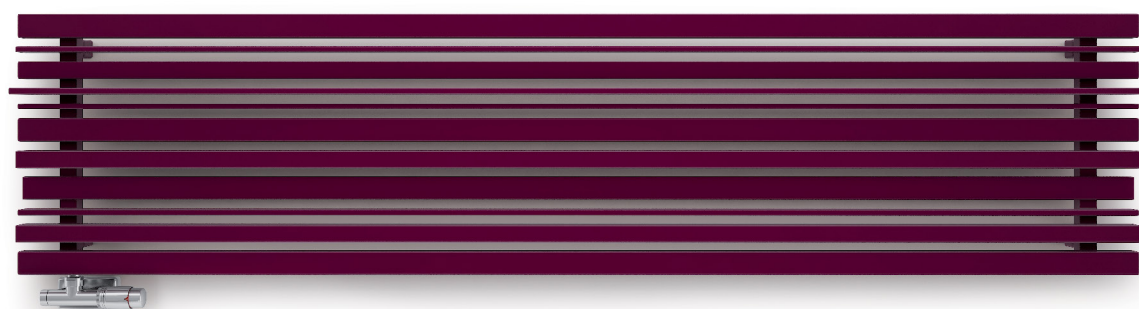

Sherwood H 440 x 1600
colour: RAL 4004

Integrated thermostatic valve with immersion tube, angled, left, chrome
NOBLE thermostatic head, chrome
Integrated pipe-masking set, chrome

Sherwood H




design: Jacek Ryń

Connections:



We recommend:


Integrated pipe-masking set



Zinc primer



Available sizes:

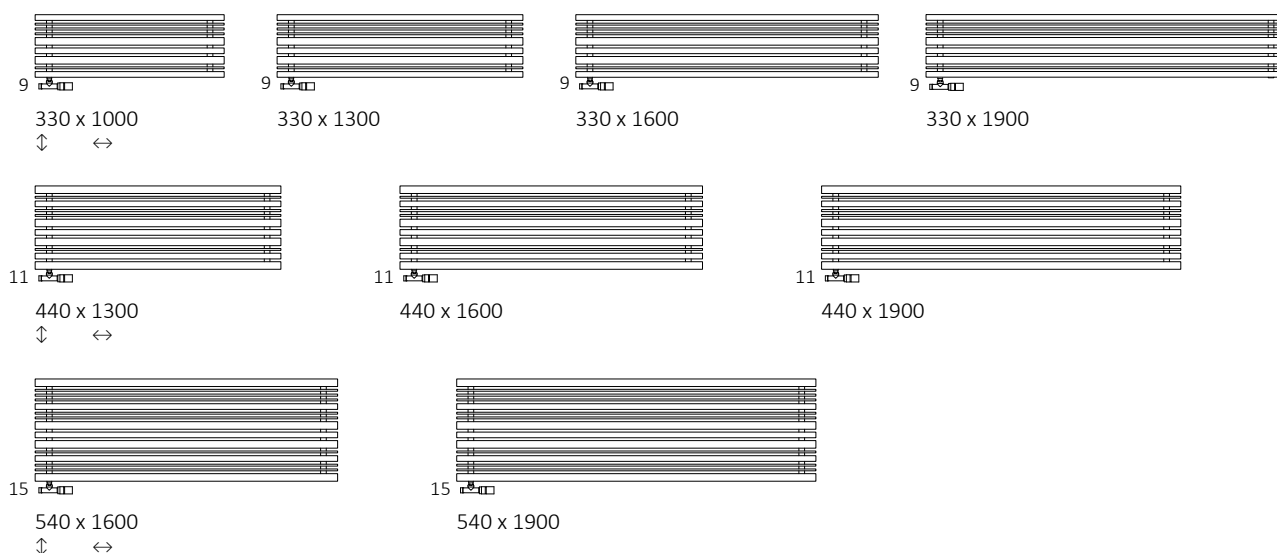

Specifications:

Working pressure: 0,7 MPa Maximum operating temperature: 95°C

A ↓	B ↔	75/65/20°C [W]	55/45/20°C [W]	D [mm]	E [mm]	F [mm]	H [dm³]	kg	Product Code Configuration codes: 4
330	1000	429	222	850	220	55	5,53	13,18	WGSTH033100
330	1300	558	289	1150	220	55	7,05	16,79	WGSTH033130
330	1600	687	356	1450	220	55	8,58	20,41	WGSTH033160
330	1900	816	422	1750	220	55	10,10	24,02	WGSTH033190
440	1300	701	364	1150	330	55	9,80	21,16	WGSTH044130
440	1600	863	448	1450	330	55	11,92	25,69	WGSTH044160
440	1900	1025	532	1750	330	55	14,05	30,23	WGSTH044190
540	1600	1057	557	1450	430	55	13,45	32,01	WGSTH054160
540	1900	1255	661	1750	430	55	15,84	37,68	WGSTH054190


Included components: The radiator is sold with an integrated, angled thermostatic valve with immersion tube, SLIM thermostatic head and adapters for installation (Alupex Ø 16x2 and copper Ø 15). All valve components are finished in chrome.

Sherwood H






Colour included
in the price

O8

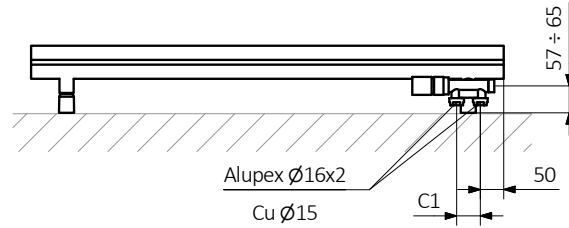


O1

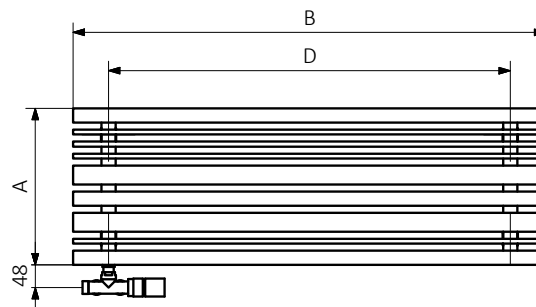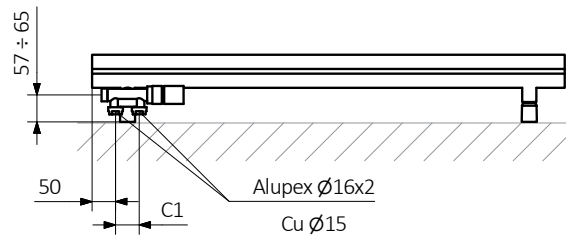

A — Height B — Width C1-C5 — Distance between pipe centres D — Horizontal distance between mounting bracket centres
E — Vertical distance between mounting brackets F — Distance between a mounting bracket and the bottom of the radiator

Collector:

Profile:

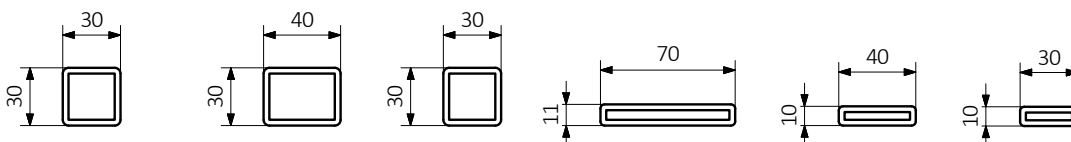



Colour included
in the price

Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

The construction of a water radiator product and configuration code:

WGALE054030

PRODUCT CODE
(located in the table for the product)

K916SX

CONFIGURATION CODE
(supplemented by hand)

Configuration

K 916 SX

Package code Colour code Connection code
K – carton box

Zinc powder primer

C – Code of zinc powder primer is an extra processes

WLALE054030 K916SX **C** — *Extra processes or additions code*



Colour included
in the price

Legend



Available in chrome finish.



Radiator available in a "water" version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a 'heating medium' and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator.
The icon shows the flow and return connections for the radiator as well as the thermostat valve and heating element position if applicable.



Optional connections available for this radiator.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.