





design: Terma

### Connections:

**A** \$ 600:





A \$ 1800:





#### We recommend:

MOA heating element



### Specifications:

A	$\begin{matrix} B \\ \leftrightarrow \end{matrix}$	⊚ [W]	D [mm]	E [mm]	F [mm]	[dm³]	<u>(</u> kg]	Product Configuration Codes. 5
600	590	800	490	500	50	10,72	23,77	WLTUV060059
600	790	1000	690	500	50	14,30	31,67	WLTUV060079
600	990	1200	890	500	50	17,87	39,56	WLTUV060099
600	1190	1500	1090	500	50	21,45	47,46	WLTUV060119
600	1390	1500	1290	500	50	25,03	55,36	WLTUV060139
1800	290	1000	190	1600	50	15,26	33,17	WLTUV180029
1800	490	1500	390	1600	50	25,44	55,17	WLTUV180049


www.termaheat.pl 20160107wolka page 1 of 6










### Available sizes:



















600 x 1590  $\leftrightarrow$ 



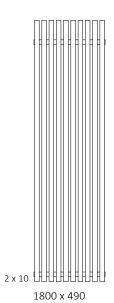


www.termaheat.pl 20160107wolka page 2 of 6










**E2** 

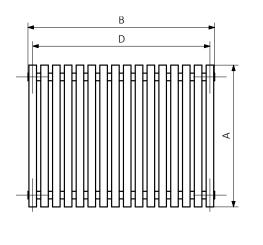



**E7** 





 $A- Height \quad B- Width \quad C1-C5- Distance \ between \ pipe \ centres \quad D- Horizontal \ distance \ between \ mounting \ bracket \ centres \\ E- Vertical \ distance \ between \ mounting \ brackets \quad F- Distance \ between \ a \ mounting \ bracket \ and \ the \ bottom \ of \ the \ radiator$ 

Profile:





www.termaheat.pl 20160107wolka page 3 of 6







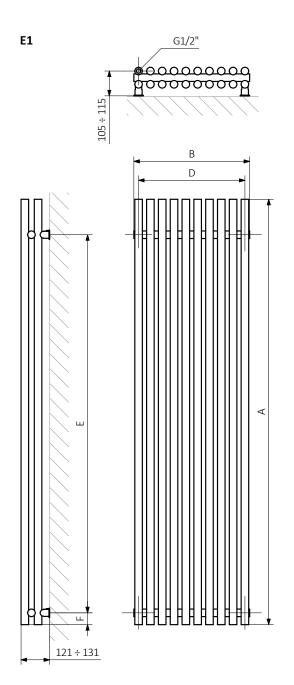



 $A- Height \quad B- Width \quad C1-C5- Distance \ between \ pipe \ centres \quad D- Horizontal \ distance \ between \ mounting \ bracket \ centres \\ E- Vertical \ distance \ between \ mounting \ brackets \quad F- Distance \ between \ a \ mounting \ bracket \ and \ the \ bottom \ of \ the \ radiator$ 

Profile:



www.termaheat.pl 20160107wolka page 4 of 6





Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

### Construction of electric heater configuration code

WLALE054030

K916E1DRYM

PRODUCT CODE (located in the table for the product)

CONFIGURATION CODE (supplemented by hand)

#### Configuration



Package code Colour code Connection code Heating element code Type of heating element cable code K-carton box

### Zinc powder primer

**C** – Code of zinc powder primer is an extra processes


WLALE054030 K916SX C — Extra processes or additions code

www.termaheat.pl 20160107wolka page 5 of 6





### Legend

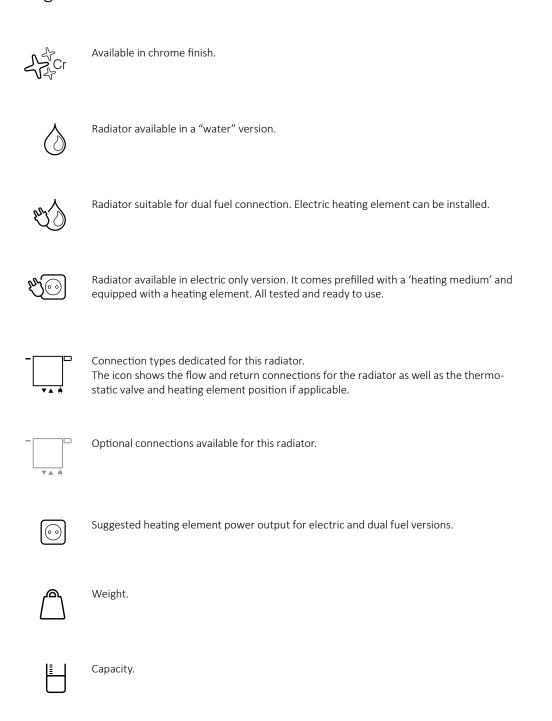

www.termaheat.pl 20160107wolka page 6 of 6