



design: Terma

Connections:





We recommend:


A set of integrated thermostatic valves for YL and YP connections




Integrated pipe-masking set




Available sizes:









Specifications:

Working pressure: 1,0 MPa Maximum operating temperature: 95°C

A	$\begin{matrix} B \\ \leftrightarrow \end{matrix}$	C1 [mm]	75 65 20°c [₩]	55 45 20°C [W]	D [mm]	[dm³]	<u>(</u> [kg]	Product configuration Code
300	1000	50	421	229	900	6,11	8,94	WGTUH030100
300	1400	50	589	320	1300	8,32	11,85	WGTUH030140
390	1000	50	564	305	900	9,05	13,05	WGTUH039100
390	1400	50	790	428	1300	12,35	17,42	WGTUH039140


 www.termaheat.pl
 20160107wolka
 page 2 of 5











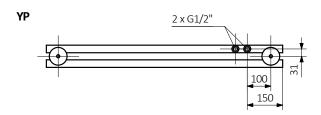

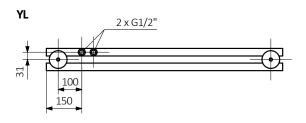

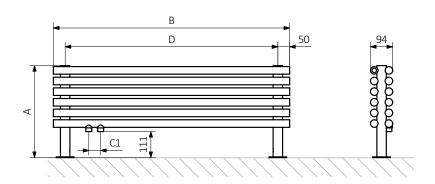

 $A-Height \quad B-Width \quad C1-C5-Distance \ between \ pipe \ centres \quad D-Horizontal \ distance \ between \ mounting \ bracket \ centres \\ E-Vertical \ distance \ between \ mounting \ brackets \quad F-Distance \ between \ a \ mounting \ bracket \ and \ the \ bottom \ of \ the \ radiator$

Collector:

Profile:









Product codes can be found in product data sheet tables. The codes provide some basic information about the product while a partially filled configuration code contains complementary information about the detailed specifications. When placing an order, product codes should include the fully completed configuration part. The configuration code part should be placed after the main product code. The main product code and configuration part will appear as shown in the example below:

The construction of a water and dual fuel radiator product and configuration code:

WGALE054030

K916SX

PRODUCT CODE (located in the table for the product)

CONFIGURATION CODE (supplemented by hand)

Configuration



Zinc powder primer

C – Code of zinc powder primer is an extra processes

WLALE054030 K916SX C — Extra processes or additions code


www.termaheat.pl 20160107wolka page 4 of 5







Legend

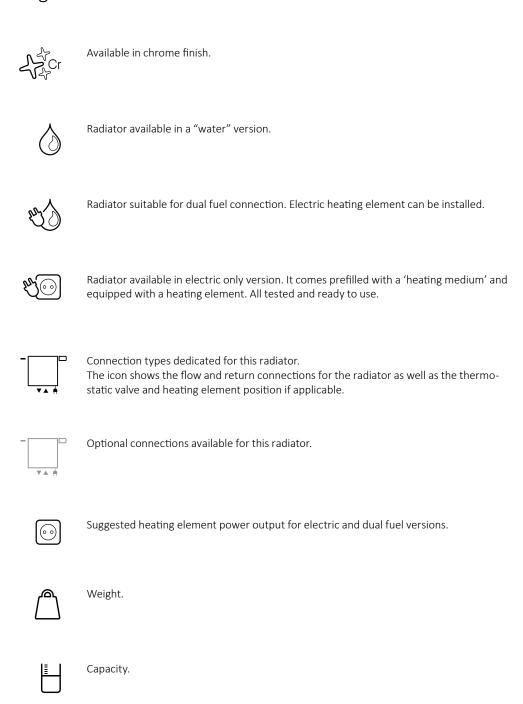

www.termaheat.pl 20160107wolka page 5 of 5